





- Using CMOS IC, high reliability and stability
- ON-OFF equal, repeat cycle time is adjustable
- High Accuracy, repeat timing error less than  $\pm 1\%$
- Offered in a wide range of AC or DC operating voltage
- Wide timing ranges, 0.1 sec.~24hrs

## SPECIFICATIONS

FULL TIME RANGE		SEC: 1, 3, 6, 10, 30, 60 MIN: 3, 6, 10, 30, 60 H R: 3, 6, 10, 24		
RATED VOLTAGE		DC(V): 12, 24, 48 AC(V): 12, 24, 48, 110, 220, 240, 380, 415, 440, 50/60Hz		
INDICATOR OPERATING		ON-UP Two Indicator Lamp		
o/p C O N T A C T	MODEL	AFK-1	AFK-2	AFK-3
	TIME LIMIT 1C	5A		5A
	TIME LIMIT 2C		5A	
	INSTANTANEOUS 1C			5A
LIFE	MECHANICAL	10 <sup>5</sup> times		
	ELECTRICAL	5 x 10 <sup>6</sup> times		
RESET TIME		0.2 sec max		
CONSUMED POWER		2VA		
AMBIENT TEMPERATURE		-10°C~ + 55°C		
AMBIENT HUMIDITY		45~85%RH		
WEIGHT		Approx. 140g		

## CONNECTION DIAGRAMS & TIMING CHARTS

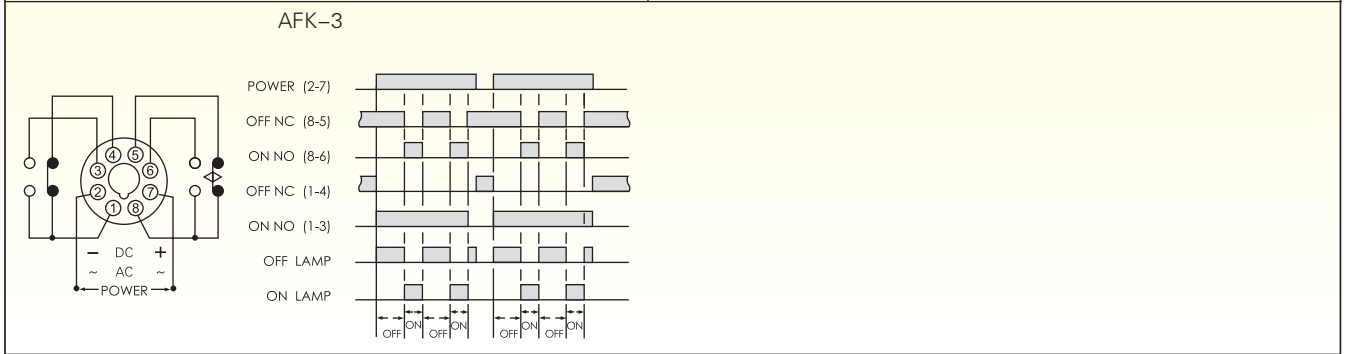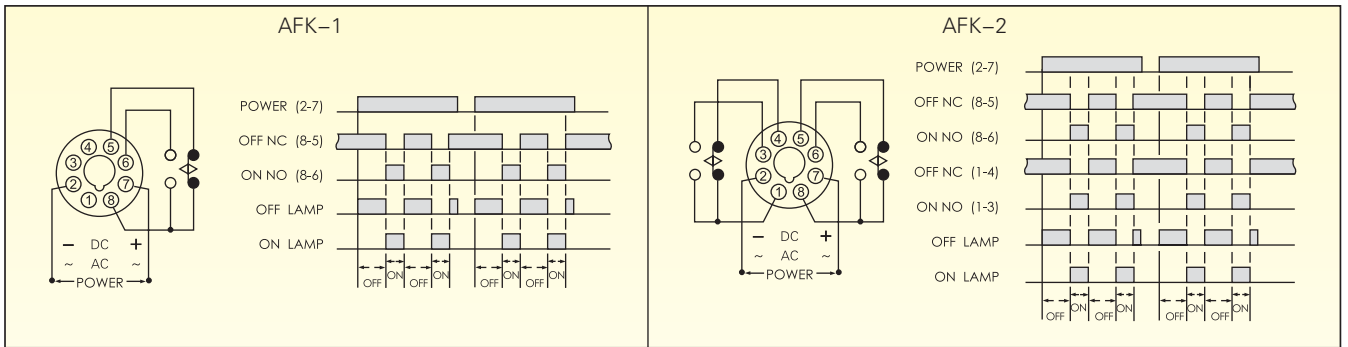

## DIMENSION

